



## Exhaust, Fuel & Water Hose



### HARDWALL WATER HOSE Series 100

Premium quality marine water hose suitable for a variety of applications including engine water intake and circulation, bilge discharge, livewell systems and other non-fuel uses. A fully embedded helical wire provides strength and flexibility. Resists heat, ozone, mild acids, bilge oils and engine water. Color coded with green strip brand.


Part #	I.D.	O.D.
EW 58	1/2"	7/8"
EW 59	5/8"	1"
EW 60	3/4"	1-7/64"
EW 61	7/8"	1-7/32"
EW 62	1"	1-11/32"
EW 63	1-1/8"	1-15/32"
EW 64	1-1/4"	1-5/8"
EW 65	1-3/8"	1-47/64"
EW 66	1-1/2"	1-55/64"
EW 67	1-5/8"	2-1/32"
EW 68	1-3/4"	2-11/64"
EW 69	1-7/8"	2-3/8"



### HARDWALL MARINE EXHAUST HOSE Series 250

Type certified for wet exhaust service. Heavy wall construction with multiple plies of nylon spiral cord prevents shock, wall collapse, panting and vibration. Resists engine exhaust, high temperatures and ozone. Wire reinforcement provides additional strength for longer connections with excellent flexibility. Recommended for runs longer than four times the inside diameter of the hose. Color coded with blue strip brand. Meets SAE J2006 standard.


Part #	I.D.	O.D.
EE 207	2"	2-13/32"
EE 210	2-3/8"	2-3/4"
EE 212	2-1/2"	2-15/16"
EE 212	2-7/8"	3-7/16"
EE 213	3"	3-9/16"
EE 213A	3-1/8"	3-45/64"
EE 214	3-1/2"	4-3/32"
EE 215	4"	4-11/32"
EE 220	5"	5-3/4"

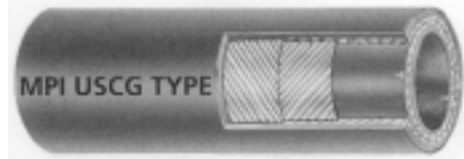

### FUEL TANK FEED AND VENT HOSE USCG TYPE A1 AND A2 Series 350

Premium quality fire-retardant fuel hose meets or exceeds SAE J1527 and all USCG requirements. Resistant to gasoline, diesel and alcohol-enhanced fuels. Braided reinforcement provides excellent flexibility and bend radius.

Part #	I.D.	O.D.
EF 102	3/8"	25/32"
EF 110	5/8"	1-1/64"

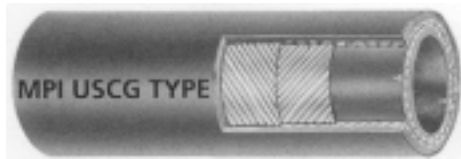

### FUEL TANK FILL HOSE USCG TYPE A2 Series 350

Premium quality fire-retardant fuel hose meets or exceeds all requirements of new ISO 7840 and SAE J1527 standards required by USCG, ABYC and NMMA. Resistant to gasoline, diesel and alcohol-enhanced fuels. Reinforced with helical wire between plies of nylon spiral cord. Provides strength and flexibility. Resistant to abrasion, heat and ozone.

Part #	I.D.	O.D.
EF 111	1-1/2"	2"

\*Many other sizes and types of hoses are available. Call for more info.

Phone: 800-225-0004  Fax: 908-486-1056  
e-mail: sales@sealandpower.com